
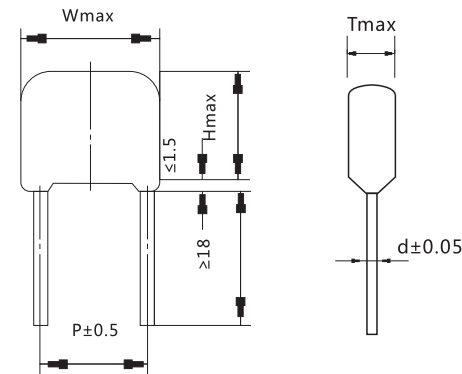


外形图 / Outline Drawing

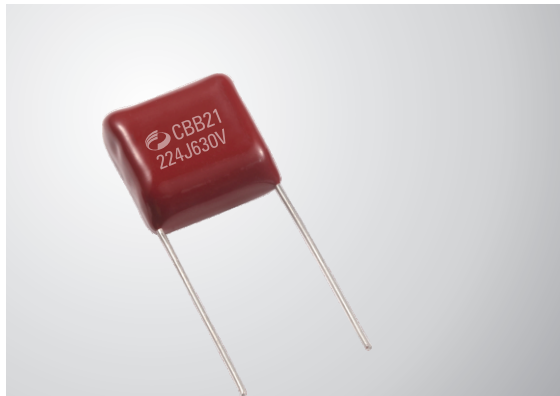

特点 / Features

- 金属化聚丙烯膜，无感卷绕结构，体积小，自愈性好；
- 适用于直流、脉动和功率较小而要求较高的高频电路。

Metallized Polypropylene film Capacitor, non-inductive wound construction, small size and excellent self-healing property. Is suitable for the direct current, impulse and low-power circuits with high requirements.

技术要求 / Specifications

参照标准 Reference Standard	IEC60384-16 GB 10190
气候类别 Climatic Category	40/105/21
工作温度范围 Operation Temperature Range	-40℃ ~ 105℃
额定温度 Rated Temperature	85℃
额定电压 Rated Voltage	100Vdc/160Vdc、250Vdc、400Vdc、630Vdc、1000Vdc、1250Vdc、1600Vdc、2000Vdc
电容量范围 Capacitance Range	0.0033 μ F ~ 6.8 μ F
电容量偏差 Capacitance Tolerance	±5% (J)、±10% (K)、±20% (M) (20℃、1KHz)
耐电压 Voltage Proof	U=1.6U _R (20℃、5S)
绝缘电阻 Insulation Resistance	100Vdc ≤ U _R < 500Vdc, C _R ≤ 0.33 μ F, IR ≥ 60000M Ω ; C _R > 0.33 μ F, τ ≥ 20000M Ω · μ F (20℃ ± 5℃、100Vdc、60S) U _R ≥ 500V, C _R ≤ 0.33 μ F, IR ≥ 60000M Ω ; C _R > 0.33 μ F, τ ≥ 20000M Ω · μ F (20℃ ± 5℃、500Vdc、60S)
损耗角正切 Dissipation Factor	1KHz ≤ 0.0010(20℃); 10KHz ≤ 0.0020 (20℃、C _R ≤ 1 μ F)

说明：电容器的额定电压随温度上升而下降，在85 ~ 105℃之间，以85℃为基准，环境温度每上升1℃，电容器的额定工作电压应降低1.25%。

Note: The working voltage of the capacitor decreases as the temperature rises. between 85 ~ 105℃, take 85℃ as the base, the temperature rises 1℃, the rated working voltage of the capacitor decreases 1.25%.

产品尺寸 / Product Dimension

100Vdc(63Vac)/160Vdc(90Vac)						250Vdc(160Vac)					
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.047	10.2	8.0	4.0	7.5	0.6	0.047	10.2	8.0	4.0	7.5	0.6
0.056	10.2	8.0	4.0	7.5	0.6	0.056	10.2	8.0	4.0	7.5	0.6
0.068	10.2	8.0	4.0	7.5	0.6	0.068	10.2	8.5	4.5	7.5	0.6
0.082	10.2	8.5	4.5	7.5	0.6	0.082	10.2	9.0	5.0	7.5	0.6
0.01	10.2	8.0	4.0	7.5	0.6	0.1	10.2	9.5	5.5	7.5	0.6
0.012	10.2	8.5	4.5	7.5	0.6	0.12	10.2	10.0	6.0	7.5	0.6
0.015	10.2	9.0	5.0	7.5	0.6	0.068	12.5	8.0	4.0	10.0	0.6
0.018	10.2	9.5	5.5	7.5	0.6	0.082	12.5	8.5	4.5	10.0	0.6
0.22	10.2	10.0	6.0	7.5	0.6	0.1	12.5	9.0	4.5	10.0	0.6
0.01	12.5	8.0	4.0	10.0	0.6	0.12	12.5	9.5	5.0	10.0	0.6
0.012	12.5	8.5	4.5	10.0	0.6	0.15	12.5	10.0	5.5	10.0	0.6
0.015	12.5	8.5	4.0	10.0	0.6	0.18	12.5	11.0	5.5	10.0	0.6
0.018	12.5	8.5	4.5	10.0	0.6	0.22	12.5	12.0	6.0	10.0	0.6
0.022	12.5	9.5	5.0	10.0	0.6	0.18	17.5	10.5	4.5	15.0	0.6
0.027	12.5	10.0	5.5	10.0	0.6	0.22	17.5	10.5	5.0	15.0	0.6
0.033	12.5	11.0	5.5	10.0	0.6	0.27	17.5	11.0	5.5	15.0	0.6
0.039	12.5	11.5	6.0	10.0	0.6	0.33	17.5	13.0	5.5	15.0	0.6
0.022	17.5	9.5	4.5	10.0	0.6	0.39	17.5	13.5	6.0	15.0	0.8
0.027	17.5	10.5	4.5	10.0	0.6	0.47	17.5	14.0	6.5	15.0	0.8
0.033	17.5	10.0	4.5	10.0	0.6	0.56	17.5	14.5	7.5	15.0	0.8
0.039	17.5	10.5	5.0	10.0	0.6	0.68	17.5	15.5	8.0	15.0	0.8
0.047	17.5	11.0	5.5	15.0	0.6	0.82	17.5	16.5	9.0	15.0	0.8
0.056	17.5	11.5	6.0	15.0	0.8	1.0	17.5	18.0	9.5	15.0	0.8
0.068	17.5	13.0	6.0	15.0	0.8	0.47	25.5	11.5	6.0	22.5	0.8
0.082	17.5	13.5	6.5	15.0	0.8	0.56	25.5	13.0	6.0	22.5	0.8
1.0	17.5	14.5	7.0	15.0	0.8	0.68	25.5	14.0	6.5	22.5	0.8
1.2	17.5	15.0	8.0	15.0	0.8	0.82	25.5	14.5	7.0	22.5	0.8
1.5	17.5	16.0	9.0	15.0	0.8	1.0	25.5	15.5	8.0	22.5	0.8
1.8	17.5	17.0	9.5	15.0	0.8	1.2	25.5	16.0	9.0	22.5	0.8
1.0	25.5	14.0	6.5	22.5	0.8	1.5	25.5	17.0	10.0	22.5	0.8
1.2	25.5	13.5	6.5	22.5	0.8	1.8	25.5	18.5	11.0	22.5	0.8
1.5	25.5	14.5	7.0	22.5	0.8	2.2	25.5	20.5	11.5	22.5	0.8
1.8	25.5	15.0	8.0	22.5	0.8	2.7	25.5	22.0	13.0	22.5	0.8
2.2	25.5	17.0	8.0	22.5	0.8	3.3	25.5	23.5	14.5	22.5	0.8
2.7	25.5	18.0	9.0	22.5	0.8	3.9	25.5	25.5	16.5	22.5	0.8
3.3	25.5	19.0	10.0	22.5	0.8	4.7	25.5	27.0	18.0	22.5	0.8
3.9	25.5	20.0	11.0	22.5	0.8						
4.7	25.5	21.0	12.5	22.5	0.8						
5.6	25.5	22.5	13.5	22.5	0.8						
6.8	25.5	24.0	15.0	22.5	0.8						



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

400Vdc(200Vac)											
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.01	10.2	8.0	4.0	7.5	0.6	0.047	17.5	10.5	4.5	15.0	0.6
0.012	10.2	8.0	4.0	7.5	0.6	0.056	17.5	10.5	4.5	15.0	0.6
0.015	10.2	8.0	4.0	7.5	0.6	0.068	17.5	10.0	4.5	15.0	0.6
0.018	10.2	8.0	4.0	7.5	0.6	0.082	17.5	10.5	5.0	15.0	0.6
0.022	10.2	8.0	4.0	7.5	0.6	0.1	17.5	10.0	4.5	15.0	0.6
0.027	10.2	8.0	4.0	7.5	0.6	0.12	17.5	10.5	5.0	15.0	0.6
0.033	10.2	8.5	4.5	7.5	0.6	0.15	17.5	11.0	5.5	15.0	0.6
0.039	10.2	9.0	5.0	7.5	0.6	0.18	17.5	11.5	6.0	15.0	0.6
0.047	10.2	9.5	5.5	7.5	0.6	0.22	17.5	12.0	6.5	15.0	0.8
0.056	10.2	9.5	5.5	7.5	0.6	0.27	17.5	14.0	6.5	15.0	0.8
0.068	10.2	11.5	6.0	7.5	0.6	0.33	17.5	14.5	7.5	15.0	0.8
0.022	12.5	8.0	4.0	10.0	0.6	0.39	17.5	15.5	8.0	15.0	0.8
0.027	12.5	8.0	4.0	10.0	0.6	0.47	17.5	16.0	9.0	15.0	0.8
0.033	12.5	8.0	4.0	10.0	0.6	0.56	17.5	17.0	10.0	15.0	0.8
0.039	12.5	8.0	4.0	10.0	0.6	0.33	25.5	13.0	5.5	22.5	0.8
0.047	12.5	8.5	4.5	10.0	0.6	0.39	25.5	13.5	6.0	22.5	0.8
0.056	12.5	9.0	5.0	10.0	0.6	0.47	25.5	14.0	7.0	22.5	0.8
0.068	12.5	10.0	5.0	10.0	0.6	0.56	25.5	15.0	7.5	22.5	0.8
0.082	12.5	11.0	5.0	10.0	0.6	0.68	25.5	15.5	8.5	22.5	0.8
0.1	12.5	11.5	5.5	10.0	0.6	0.82	25.5	17.5	8.5	22.5	0.8
0.12	12.5	12.0	6.0	10.0	0.6	1.0	25.5	18.5	9.5	22.5	0.8
0.15	12.5	12.5	7.0	10.0	0.6	1.2	25.5	19.5	10.5	22.5	0.8
0.18	12.5	13.5	8.0	10.0	0.6	1.5	25.5	21.0	12.0	22.5	0.8
0.22	12.5	14.5	8.5	10.0	0.6	1.8	25.5	22.0	13.5	22.5	0.8
						2.2	25.5	24.5	15.5	22.5	0.8
						2.7	25.5	27.0	16.5	22.5	0.8



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

630Vdc(220Vac)											
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.0068	10.2	8.0	4.0	7.5	0.6	0.056	17.5	10.5	5.0	15.0	0.6
0.0082	10.2	8.0	4.0	7.5	0.6	0.068	17.5	11.0	5.5	15.0	0.6
0.01	10.2	8.0	4.0	7.5	0.6	0.082	17.5	13.0	5.5	15.0	0.6
0.012	10.2	8.0	4.0	7.5	0.6	0.1	17.5	13.5	6.0	15.0	0.8
0.015	10.2	8.5	4.5	7.5	0.6	0.12	17.5	14.0	6.5	15.0	0.8
0.018	10.2	9.0	5.0	7.5	0.6	0.15	17.5	14.5	7.5	15.0	0.8
0.022	10.2	9.5	5.5	7.5	0.6	0.18	17.5	15.5	8.0	15.0	0.8
0.027	10.2	11.0	5.5	7.5	0.6	0.22	17.5	16.5	9.0	15.0	0.8
0.033	10.2	12.0	6.0	7.5	0.6	0.27	17.5	17.5	10.0	15.0	0.8
0.01	12.5	8.0	4.0	10.0	0.6	0.1	25.5	12.5	5.5	22.5	0.8
0.012	12.5	8.0	4.0	10.0	0.6	0.12	25.5	13.0	6.0	22.5	0.8
0.015	12.5	8.0	4.0	10.0	0.6	0.15	25.5	13.0	6.0	22.5	0.8
0.018	12.5	8.0	4.0	10.0	0.6	0.18	25.5	13.5	6.5	22.5	0.8
0.022	12.5	8.5	4.5	10.0	0.6	0.22	25.5	14.5	7.0	22.5	0.8
0.027	12.5	9.5	4.5	10.0	0.6	0.27	25.5	15.0	8.0	22.5	0.8
0.033	12.5	10.0	5.0	10.0	0.6	0.33	25.5	16.0	8.5	22.5	0.8
0.039	12.5	11.0	5.5	10.0	0.6	0.39	25.5	16.5	9.5	22.5	0.8
0.047	12.5	11.5	6.0	10.0	0.6	0.47	25.5	18.5	10.0	22.5	0.8
0.056	12.5	12.0	6.5	10.0	0.6	0.56	25.5	19.5	10.5	22.5	0.8
0.033	17.5	10.0	4.5	15.0	0.6	0.68	25.5	21.0	12.0	22.5	0.8
0.039	17.5	10.5	4.5	15.0	0.6	0.82	25.5	22.5	14.0	22.5	0.8
0.047	17.5	10.5	4.5	15.0	0.6	1.0	25.5	24.0	15.5	22.5	0.8



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

1000Vdc(400Vac)						1250Vdc(450Vac)					
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.001	10.2	8.0	3.5	7.5	0.6	0.001	10.2	8.0	4.0	7.5	0.6
0.0012	10.2	7.5	3.5	7.5	0.6	0.0012	10.2	8.0	4.0	7.5	0.6
0.0015	10.2	8.0	4.0	7.5	0.6	0.0015	10.2	8.5	4.5	7.5	0.6
0.0018	10.2	8.0	4.0	7.5	0.6	0.0018	10.2	9.0	4.5	7.5	0.6
0.0022	10.2	8.0	4.0	7.5	0.6	0.0022	10.2	9.0	5.0	7.5	0.6
0.0027	10.2	8.5	4.5	7.5	0.6	0.0027	10.2	9.5	5.5	7.5	0.6
0.0033	10.2	9.0	5.0	7.5	0.6	0.0022	12.5	8.0	4.0	10.0	0.6
0.0039	10.2	9.5	5.5	7.5	0.6	0.0027	12.5	8.5	4.5	10.0	0.6
0.0047	10.2	10.0	6.0	7.5	0.6	0.0033	12.5	9.5	4.5	10.0	0.6
0.0022	12.5	8.0	4.0	10.0	0.6	0.0039	12.5	9.5	5.0	10.0	0.6
0.0027	12.5	8.0	4.0	10.0	0.6	0.0047	12.5	10.5	5.0	10.0	0.6
0.0033	12.5	8.0	4.0	10.0	0.6	0.0056	12.5	11.0	5.5	10.0	0.6
0.0039	12.5	8.0	4.0	10.0	0.6	0.0068	12.5	11.5	6.0	10.0	0.6
0.0047	12.5	8.5	4.5	10.0	0.6	0.0068	17.5	10.0	4.5	15.0	0.6
0.0056	12.5	9.5	4.5	10.0	0.6	0.0082	17.5	10.5	5.0	15.0	0.6
0.0068	12.5	10.0	5.0	10.0	0.6	0.01	17.5	11.0	5.0	15.0	0.6
0.0082	12.5	10.5	5.5	10.0	0.6	0.012	17.5	11.5	5.5	15.0	0.6
0.01	12.5	11.0	6.0	10.0	0.6	0.015	17.5	12.0	6.5	15.0	0.6
0.012	12.5	12.0	6.0	10.0	0.6	0.018	17.5	12.5	7.0	15.0	0.6
0.01	17.5	10.0	4.0	15.0	0.6	0.022	17.5	14.5	7.0	15.0	0.8
0.012	17.5	10.5	4.5	15.0	0.6	0.027	17.5	15.0	8.0	15.0	0.8
0.015	17.5	10.5	5.0	15.0	0.6	0.033	17.5	16.0	8.5	15.0	0.8
0.018	17.5	11.0	5.5	15.0	0.6	0.039	17.5	16.5	9.5	15.0	0.8
0.022	17.5	11.5	6.0	15.0	0.6	0.027	25.5	13.0	6.0	22.5	0.8
0.027	17.5	12.5	6.5	15.0	0.8	0.033	25.5	13.5	6.5	22.5	0.8
0.033	17.5	14.0	6.5	15.0	0.8	0.039	25.5	14.0	7.0	22.5	0.8
0.039	17.5	14.5	7.5	15.0	0.8	0.047	25.5	15.0	7.5	22.5	0.8
0.047	17.5	15.5	8.0	15.0	0.8	0.056	25.5	16.5	8.0	22.5	0.8
0.056	17.5	16.0	9.0	15.0	0.8	0.068	25.5	17.5	8.5	22.5	0.8
0.068	17.5	17.0	10	15.0	0.8	0.082	25.5	18.5	9.5	22.5	0.8
0.039	25.5	12.5	5.5	22.5	0.8	0.1	25.5	19.5	10.5	22.5	0.8
0.047	25.5	13.5	6.0	22.5	0.8	0.12	25.5	20.5	12.0	22.5	0.8
0.056	25.5	14.0	6.5	22.5	0.8	0.15	25.5	22.5	13.5	22.5	0.8
0.068	25.5	14.5	7.0	22.5	0.8	0.18	25.5	23.5	15.0	22.5	0.8
0.082	25.5	15.5	8.0	22.5	0.8						
0.1	25.5	17.0	8.5	22.5	0.8						
0.12	25.5	18.0	9.0	22.5	0.8						
0.15	25.5	19.0	10	22.5	0.8						
0.18	25.5	20.5	11	22.5	0.8						
0.22	25.5	21.5	13	22.5	0.8						
0.27	25.5	23.5	15	22.5	0.8						
0.33	25.5	25.5	16	22.5	0.8						



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

1600Vdc(500Vac)											
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.0033	17.5	10.5	4.5	15.0	0.6	0.015	25.5	13.5	6.0	22.5	0.8
0.0039	17.5	10.5	5.0	15.0	0.6	0.018	25.5	14.0	6.5	22.5	0.8
0.0047	17.5	11.0	5.5	15.0	0.6	0.022	25.5	14.5	7.5	22.5	0.8
0.0056	17.5	11.5	6.0	15.0	0.6	0.027	25.5	15.5	8.0	22.5	0.8
0.0068	17.5	12.0	6.5	15.0	0.6	0.033	25.5	17.0	8.0	22.5	0.8
0.0082	17.5	12.5	7.0	15.0	0.6	0.039	25.5	18.0	9.0	22.5	0.8
0.01	17.5	14.5	7.0	15.0	0.6	0.047	25.5	19.0	10.0	22.5	0.8
0.012	17.5	15.0	7.5	15.0	0.6	0.056	25.5	20.0	11.0	22.5	0.8
0.015	17.5	16.0	8.5	15.0	0.6	0.068	25.5	21.0	12.0	22.5	0.8
0.018	17.5	17.0	9.5	15.0	0.6	0.082	25.5	22.5	13.5	22.5	0.8
						0.1	25.5	24.0	15.0	22.5	0.8

1600Vdc(600Vac)											
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.00047	12.5	8.0	4.0	10.0	0.6	0.012	17.5	12.0	6.0	15.0	0.8
0.00056	12.5	8.5	4.5	10.0	0.6	0.015	17.5	12.5	7.0	15.0	0.8
0.00068	12.5	8.0	4.0	10.0	0.6	0.018	17.5	13.0	7.5	15.0	0.8
0.00082	12.5	8.0	4.0	10.0	0.6	0.022	17.5	14.0	8.5	15.0	0.8
0.001	12.5	8.0	4.0	10.0	0.6	0.027	17.5	15.0	9.5	15.0	0.8
0.0012	12.5	8.0	4.0	10.0	0.6	0.033	17.5	17.0	9.5	15.0	0.8
0.0015	12.5	8.0	4.0	10.0	0.6	0.039	17.5	18.0	10.5	15.0	0.8
0.0018	12.5	8.5	4.5	10.0	0.6	0.006	25.5	13.0	6.0	22.5	0.8
0.0022	12.5	9.0	4.5	10.0	0.6	0.008	25.5	13.5	6.5	22.5	0.8
0.0027	12.5	9.5	5.0	10.0	0.6	0.01	25.5	13.0	6.0	22.5	0.8
0.0033	12.5	10.5	5.0	10.0	0.6	0.012	25.5	13.0	5.5	22.5	0.8
0.0039	12.5	11.0	5.5	10.0	0.6	0.015	25.5	13.0	5.5	22.5	0.8
0.0047	12.5	11.5	6.0	10.0	0.6	0.018	25.5	13.5	6.0	22.5	0.8
0.0015	17.5	9.0	4.5	15.0	0.6	0.022	25.5	13.0	6.0	22.5	0.8
0.0018	17.5	10.0	4.5	15.0	0.6	0.027	25.5	14.0	6.5	22.5	0.8
0.0022	17.5	10.5	5.0	15.0	0.6	0.033	25.5	15.5	7.0	22.5	0.8
0.0027	17.5	10.0	4.5	15.0	0.6	0.039	25.5	16.0	7.5	22.5	0.8
0.0033	17.5	10.0	4.5	15.0	0.6	0.047	25.5	17.0	8.5	22.5	0.8
0.0039	17.5	10.5	4.5	15.0	0.6	0.056	25.5	18.0	9.0	22.5	0.8
0.0047	17.5	10.0	4.5	15.0	0.6	0.068	25.5	19.0	10.0	22.5	0.8
0.0056	17.5	10.0	4.5	15.0	0.6	0.082	25.5	20.0	11.5	22.5	0.8
0.0068	17.5	10.5	4.5	15.0	0.6	0.1	25.5	21.5	12.5	22.5	0.8
0.0082	17.5	11.0	5.0	15.0	0.6						
0.01	17.5	11.5	5.5	15.0	0.6						



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

2000Vdc(700Vac)											
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.00047	12.5	8.0	4.0	10.0	0.6	0.012	17.5	13.5	8.0	15.0	0.8
0.00056	12.5	8.5	4.5	10.0	0.6	0.015	17.5	14.5	9.0	15.0	0.8
0.00068	12.5	8.0	4.0	10.0	0.6	0.018	17.5	16.5	9.0	15.0	0.8
0.00082	12.5	8.0	4.0	10.0	0.6	0.022	17.5	17.5	10.5	15.0	0.8
0.001	12.5	8.5	4.5	10.0	0.6	0.0068	25.5	13.0	6.0	22.5	0.8
0.0012	12.5	8.5	4.5	10.0	0.6	0.0082	25.5	13.5	6.5	22.5	0.8
0.0015	12.5	9.5	5.0	10.0	0.6	0.01	25.5	13.0	6.0	22.5	0.8
0.0018	12.5	10.5	5.0	10.0	0.6	0.012	25.5	13.0	5.5	22.5	0.8
0.0022	12.5	11.0	5.5	10.0	0.6	0.015	25.5	13.5	6.5	22.5	0.8
0.0027	12.5	11.5	6.0	10.0	0.6	0.018	25.5	14.0	7.0	22.5	0.8
0.0033	12.5	12.0	6.5	10.0	0.6	0.022	25.5	15.0	8.0	22.5	0.8
0.0015	17.5	9.0	4.5	15.0	0.6	0.027	25.5	17.0	8.0	22.5	0.8
0.0018	17.5	10.0	4.5	15.0	0.6	0.033	25.5	18.0	9.0	22.5	0.8
0.0022	17.5	10.5	5.0	15.0	0.6	0.039	25.5	19.0	10.0	22.5	0.8
0.0027	17.5	10.0	4.5	15.0	0.6	0.047	25.5	20.0	11.0	22.5	0.8
0.0033	17.5	10.0	4.5	15.0	0.6	0.056	25.5	21.0	12.0	22.5	0.8
0.0039	17.5	10.5	4.5	15.0	0.6	0.068	25.5	22.5	13.5	22.5	0.8
0.0047	17.5	10.5	5.0	15.0	0.6	0.082	25.5	24.0	15.0	22.5	0.8
0.0056	17.5	11.0	5.5	15.0	0.6						
0.0068	17.5	11.5	6.0	15.0	0.8						
0.0082	17.5	12.5	6.5	15.0	0.8						
0.01	17.5	13.0	7.5	15.0	0.8						



CBB21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor

产品尺寸 / Product Dimension

400/450Vdc						630V					
容量(μF)	W	H	T	P±0.5	d±0.5	容量(μF)	W	H	T	P±0.5	d±0.5
0.047	9.8	7.1	3.5	7.5	0.5	0.022	9.8	7.6	3.9	7.5	0.5
0.056	9.8	7.5	3.7	7.5	0.5	0.027	9.8	7.6	3.9	7.5	0.5
0.068	9.8	7.5	3.7	7.5	0.5	0.033	9.8	7.6	3.9	7.5	0.5
0.082	9.8	7.5	3.7	7.5	0.5	0.039	9.8	7.6	3.9	7.5	0.5
0.1	9.8	7.6	3.7	7.5	0.5	0.047	9.8	7.6	3.9	7.5	0.5
0.12	9.8	7.9	4.0	7.5	0.5	0.056	9.8	7.8	4.0	7.5	0.5
0.15	9.8	8.3	4.4	7.5	0.5	0.068	9.8	8.2	4.3	7.5	0.5
0.18	9.8	9.0	4.5	7.5	0.5	0.082	9.8	8.8	4.5	7.5	0.5
0.22	9.8	10.0	4.7	7.5	0.5	0.1	9.8	9.3	5.1	7.5	0.5
0.1	12.3	7.5	3.5	10.0	0.6	0.12	9.8	10.0	5.3	7.5	0.5
0.12	12.3	7.5	3.5	10.0	0.6	0.15	9.8	11.0	6.0	7.5	0.5
0.15	12.3	7.8	3.8	10.0	0.6	0.18	9.8	12.5	6.0	7.5	0.5
0.18	12.3	8.0	4.0	10.0	0.6	0.22	9.8	13.0	7.0	7.5	0.5
0.22	12.3	8.5	4.5	10.0	0.6	0.1	12.3	8.5	4.3	10.0	0.6
0.27	12.3	8.8	5.0	10.0	0.6	0.12	12.3	9.0	4.7	10.0	0.6
0.33	12.3	9.3	5.4	10.0	0.6	0.15	12.3	10.0	5.0	10.0	0.6
0.39	12.3	10.7	5.2	10.0	0.6	0.18	12.3	10.8	5.1	10.0	0.6
0.47	12.3	11.1	5.7	10.0	0.6	0.22	12.3	11.5	5.6	10.0	0.6
0.56	12.3	12.5	6.3	10.0	0.6	0.27	12.3	13.0	5.7	10.0	0.6
0.68	12.3	14.0	6.5	10.0	0.6	0.33	12.3	13.8	6.5	10.0	0.6
0.82	12.3	16.0	6.6	10.0	0.6	0.39	12.3	14.5	7.0	10.0	0.6
1.0	12.3	16.7	7.3	10.0	0.6	0.47	12.3	15.5	8.0	10.0	0.6
0.47	17.5	10.4	4.5	15.0	0.6	0.68	12.3	17.2	9.5	10.0	0.6
0.56	17.5	11.0	5.0	15.0	0.6	0.82	12.3	19.5	10.0	10.0	0.6
0.68	17.5	11.5	5.5	15.0	0.6	1.0	12.3	21.5	10.5	10.0	0.6
0.82	17.5	12.3	6.0	15.0	0.6	0.33	17.5	11.0	5.2	15.0	0.6
1.0	17.5	12.9	6.5	15.0	0.6	0.47	17.5	12.0	6.2	15.0	0.6
						0.56	17.5	13.5	6.3	15.0	0.6
						0.68	17.5	14.5	7.0	15.0	0.6
						0.82	17.5	16.5	7.1	15.0	0.6
						1.0	17.5	17.5	8.0	15.0	0.6