



Features

- Wide input range: 90-305Vac
- Constant voltage mode operation
- Surge protection: Line-Line 4KV / Line-Earth 6KV
- Built-in with active PFC function
- Output over-current, over-voltage, over-temperature and short-circuit protections
- IP67 enclosure for indoor and outdoor applications
- UL 8750 recognized



Applications

- Landscape lighting, strip lighting, decorative lighting, architecture lighting

Selection Guide

Part Number	Max. Output Power (W)	Output Voltage (Vdc)	Output Current Adjustable Range (A)	Output Mode	Typical Efficiency
LSA035B-012C	35	12	0-2.90	CV	85%
LSA035B-024C		24	0-1.46	CV	87%
LSA035B-036C		36	0-0.97	CV	87%
LSA035B-048C		48	0-0.73	CV	88%

Input Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Input Voltage Range	AC input	90	100-277	305	Vac
Input Frequency Range		47	50/60	63	Hz
Power Factor	230Vac input, full load	0.95	0.96	-	-
Input Current	100-277Vac input, full load	-	-	0.5	A
Inrush Current	230Vac input, full load, cold start	-	-	75	A
Leakage Current	277Vac input, 50Hz	-	-	0.75	mA
THD	230Vac input, full load	-	-	20	%

Output Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Output Current Tolerance	Full load	-5	-	+5	%Iset
Output Voltage Ripple		-	-	3	%
Output Overshoot		-	-	10	%
Line Regulation	90-305Vac input, full load	-	-	3	%
Load Regulation	230Vac input, 50-100% of full load	-	-	3	%
Turn-on Delay	100-277Vac input, full load	-	-	3	s
Efficiency LSA035B-012C LSA035B-024C LSA035B-036C LSA035B-048C	115Vac input, full load	82 84 84 85	84 86 86 87	- - - -	%
Efficiency LSA035B-012C LSA035B-024C LSA035B-036C LSA035B-048C	230Vac input, full load	83 85 85 86	85 87 87 88	- - - -	%
Efficiency LSA035B-012C LSA035B-024C LSA035B-036C LSA035B-048C	277Vac input, full load	83 85 85 86	85 87 87 88	- - - -	%

Note:

1. Unless otherwise specified, data in this datasheet should be tested under the conditions of 230Vac input, rated load and Ta=25°C.
2. Ripple is measured at 20MHz bandwidth by using a 0.1μF & 10μF parallel capacitor.

Protection Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Over Current Protection	Hiccup mode, auto-recovery	-	-	200	%
Over Voltage Protection	Auto-recovery	110	-	150	%
Over Temperature Protection	Auto-recovery				
Short-circuit Protection	Hiccup mode, auto-recovery				

Environmental and Other Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Ambient Temperature	Ta	-40	-	+60	°C
Operating Case Temperature	Tc	-40	-	+85	°C
Storage Temperature		-40	-	+85	°C
Storage Relative Humidity		20	-	95	%RH
Isolation Voltage	Input-Output	-	3,750	-	Vac
	Input-PE	-	1,600	-	
	Output-PE	-	1,600	-	
Insulation Resistance	Input-Output/Input-PE/Output-PE, 500Vdc/60s /70%RH	50	-	-	MΩ
Grounding Resistance	25A/60s	-	-	0.1	Ω
Life Time	230Vac, full load, 70°C case temperature	-	50	-	10 ³ hrs
MTBF(MIL-HDBK-217F)	230Vac input, 80% of full load	-	200	-	10 ³ hrs
Dimensions (L*W*H)	199.0 x 42.5 x 34.0 mm				
Weight	510±50g				

EMC Specifications

Parameter	Standards
EMI	EN55015
	EN61000-3-2,3
EMS	EN61547
	EN61000-4-2, 3, 4, 5, 6, 8, 11

Characteristic Curves

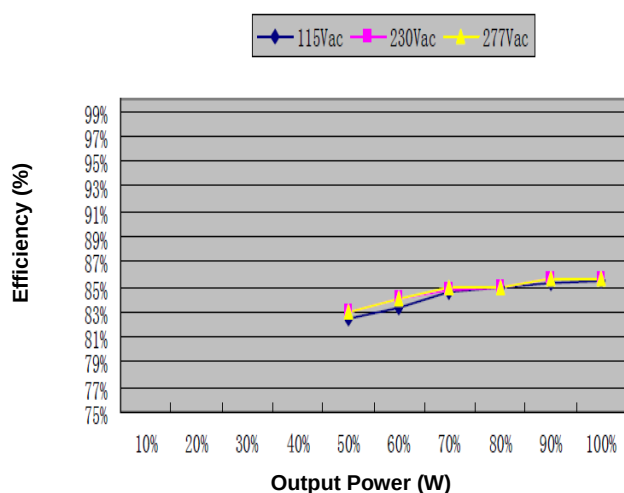


Figure 1: Efficiency vs. Output Power (Vo=12V)

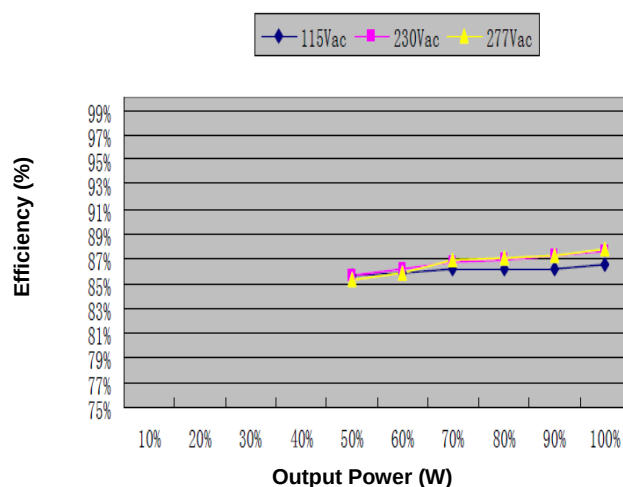


Figure 2: Efficiency vs. Output Power (Vo=24V)

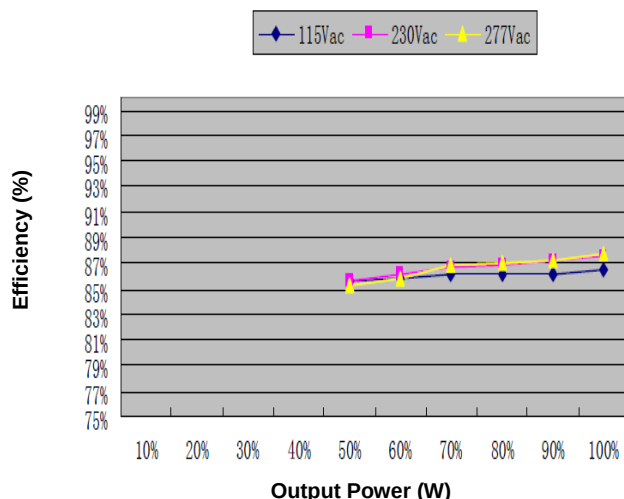


Figure 3: Efficiency vs. Output Power (Vo=36V)

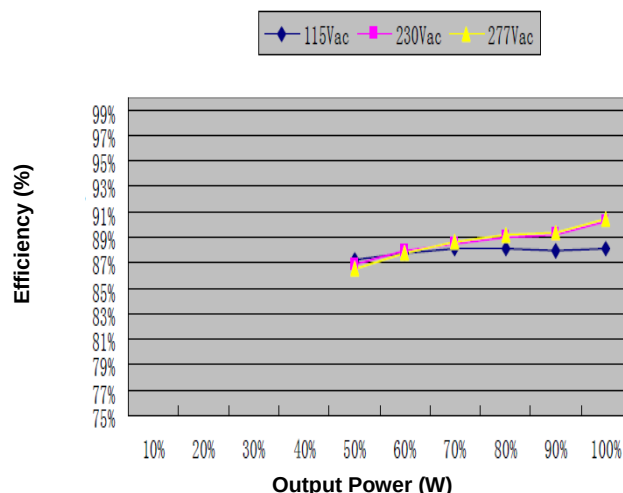


Figure 4: Efficiency vs. Output Power (Vo=48V)

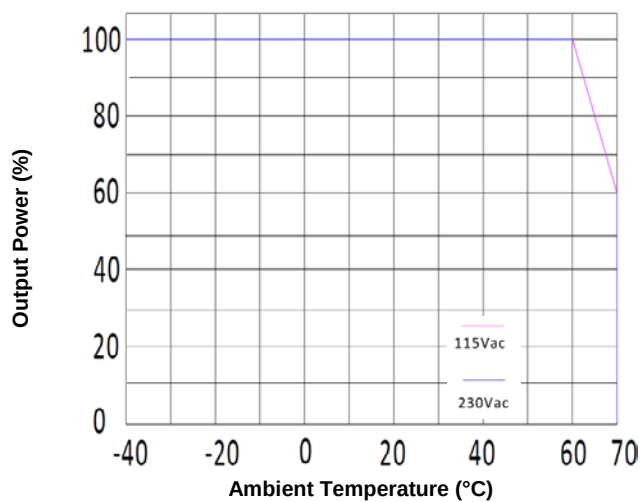


Figure 5: Output Power vs. Ambient Temperature

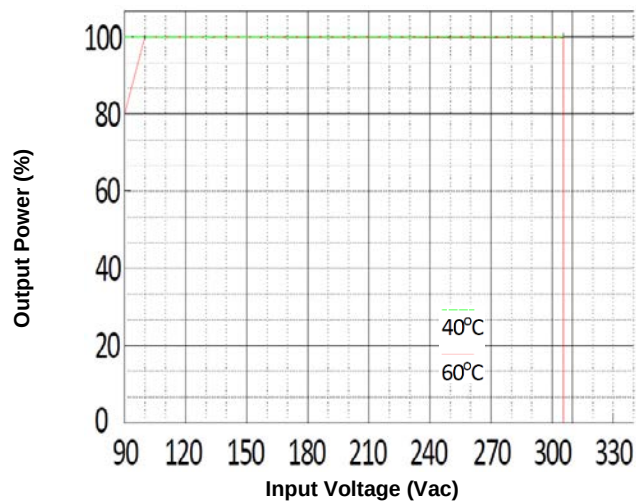


Figure 6: Output Power vs. Input Voltage

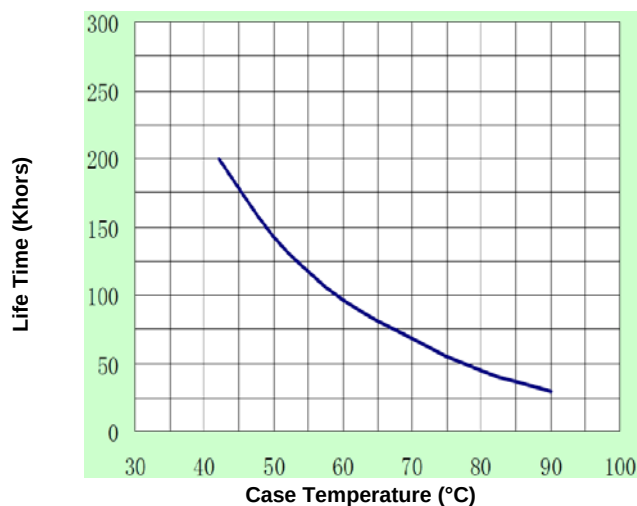


Figure 7: Life Time vs. Case Temperature

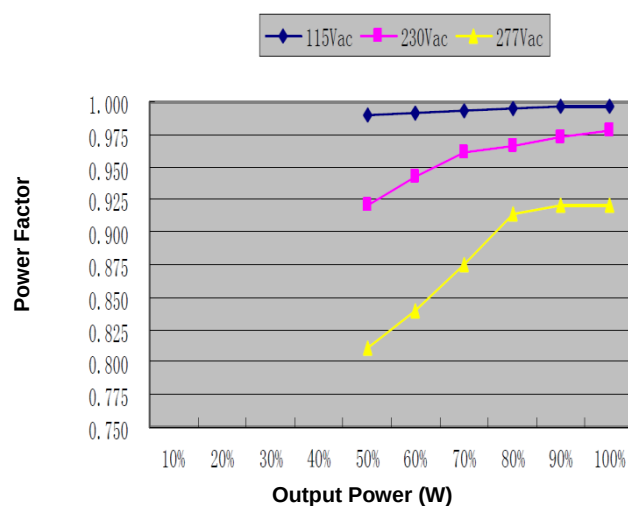


Figure 8: Power Factor vs. Output Power

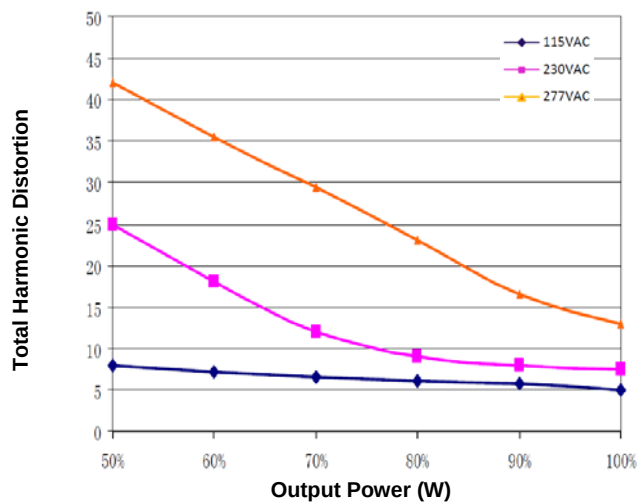


Figure 9: Total Harmonic Distortion vs. Output Power

Wire	Specification
Input	SJOW 18AWG*3C
Output	SJOW 18AWG*2C