



P-DUKE POWER

MAD40 Single Series

2 X 3 Inch AC-DC POWER SUPPLIES
Up to 40 Watts

5
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

+85°C
-40°C
AMBIENT TEMP.



Medical



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



PV



Railway



2
X
MOPP

4000
VAC
Reinforced
Insulation

ADJ.
Output
Voltage

Internal
EN55032
Class
Filter **B**

LOW
Leakage
Current

LOW
Standby
Power

Operating
Altitude
5000
meter

Protection
Class I
Class II

OCP

OVP

SCP

PART NUMBER STRUCTURE

M	A	D	40	U	S	12	C	-	□
Application	Package Code	Dimension Code	Output Power (W)	Input Voltage (VAC)	Output Quantity	Output Voltage (VDC)	Protection Type		Connector Options
Medical Application	A: Open type U: U chassis type E: Enclosed type D: Din rail type			U: Universal 85 ~ 264	S: Single	05: 5 7P5: 7.5 09: 9 12: 12 121: 12 15: 15 151: 15 18: 18 24: 24 28: 28 36: 36 48: 48 53: 53	C: CLASS I D: CLASS II □: CLASS I (※NRND) B: CLASS II (※NRND)		□: JST M: Molex T: Terminal Block
							※NRND: Not recommended for new designs		

TECHNICAL SPECIFICATION All specifications are typical at 230VAC input, full load and 25°C unless otherwise noted

Model Number	Input Range VAC	Output Voltage VDC	Output Current Natural convection A	Max. Output Power W	Input Power @ No Load W	Efficiency %	Maximum Capacitor Load μF
MAD40US05C MUD40US05C MED40US05C MDD40US05C	85 ~ 264	5	8	40	0.11	90	16000
MAD40US7P5C MUD40US7P5C MED40US7P5C MDD40US7P5C	85 ~ 264	7.5	5.34	40	0.11	90	7120
MAD40US09C MUD40US09C MED40US09C MDD40US09C	85 ~ 264	9	4.45	40	0.11	91	4945
MAD40US12C MUD40US12C MED40US12C MDD40US12C	85 ~ 264	12	3.34	40	0.11	92	2785
MAD40US121C MUD40US121C MED40US121C MDD40US121C	85 ~ 264	12	3.34	40	0.11	90	2785
MAD40US15C MUD40US15C MED40US15C MDD40US15C	85 ~ 264	15	2.67	40	0.11	92	1780
MAD40US151C MUD40US151C MED40US151C MDD40US151C	85 ~ 264	15	2.67	40	0.11	90	1780
MAD40US18C MUD40US18C MED40US18C MDD40US18C	85 ~ 264	18	2.23	40	0.11	91	1250
MAD40US24C MUD40US24C MED40US24C MDD40US24C	85 ~ 264	24	1.67	40	0.11	92	700
MAD40US28C MUD40US28C MED40US28C MDD40US28C	85 ~ 264	28	1.43	40	0.11	91	510
MAD40US36C MUD40US36C MED40US36C MDD40US36C	85 ~ 264	36	1.12	40	0.11	92	310
MAD40US48C MUD40US48C MED40US48C MDD40US48C	85 ~ 264	48	0.84	40	0.11	93	175
MAD40US53C MUD40US53C MED40US53C MDD40US53C	85 ~ 264	53	0.77	40	0.11	92.5	140

INPUT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	AC input	85		264	VAC
	DC input	120		370	VDC
Input frequency	AC input	47		63	Hz
Input current	100VAC and Full Load			1.0	A
	240VAC and Full Load			0.5	A
No load input power	230VAC		0.11		Watts
Leakage current	264VAC		75		μA
Start up time				1000	ms
Rise time			20		ms
Hold up time	115VAC and Full Load		25		ms
Input inrush current	230VAC		60		A
Input protection	Internal fuse in line and neutral			T3.15A/250VAC	

OUTPUT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output power				40	Watts
Initial set voltage accuracy	230VAC and Full Load	-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	-0.7		+0.7	%
	10% Load to 90% Load	-0.5		+0.5	%
Voltage adjustability	Single output	5Vout			
		Others			
		53Vout		+10	%
Minimum load		-0.6		+0.6	
		-0.4		+0.4	
Ripple and noise	Measured by 20MHz bandwidth With a 10μF/25V 1206 X7R MLCC	5Vout, 7.5Vout, 9Vout 12Vout, 15Vout, 18Vout 24Vout, 28Vout, 36Vout 48Vout, 53Vout	75 75 75 150		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response	Load step from 50 ~ 75% change at 2.5A/μs	Peak deviation Recovery time	3 600		%Vout μs
Over voltage protection	% of Vout(nom); Latch mode	125		140	%
Over load protection	% of Iout rated; Hiccup mode		145		%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (2MOPP insulation)	4000			VAC
		2500			VAC
Isolation resistance	500VDC	0.1			GΩ
Switching frequency	230VAC	5Vout Others	70		kHz
			120		kHz
Safety approvals	IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 62368-1			UL:E360199 UL:E193009 CB:UL(Demko)	
Weight		MAD		114g (4.02oz)	
		MUD		154g (5.43oz)	
		MED		169g (5.96oz)	
		MDD		190g (6.70oz)	
MTBF	MIL-HDBK-217F, Full load			3.010 x 10 ⁵ hrs	


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Natural convection With derating	-40		+85	°C
Storage temperature range		-40		+85	°C
Operating altitude				5000	m
Shock				IEC60068-2-27	
Vibration				IEC60068-2-6	
Relative humidity	Non-condensing			5% to 95% RH	


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55011, EN55032, EN60601-1-2 and FCC Part 18 / 15 External components may be required for class I application.	Conducted Class B Radiated Class B
Harmonic currents	EN61000-3-2 Full Load	Class A
Voltage flicker	EN61000-3-3	
EMS	EN55024 and EN60601-1-2	
ESD	EN61000-4-2 Air ± 15 kV and Contact ± 8 kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2 kV	Perf. Criteria A
Surge	EN61000-4-5 DM ± 1 kV and CM ± 2 kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 20 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 30 A/m	Perf. Criteria A
Dip and interruptions	EN61000-4-11	


CHARACTERISTIC CURVE

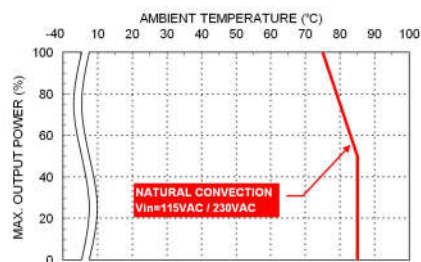


Derating Curve vs. Ambient Temperature

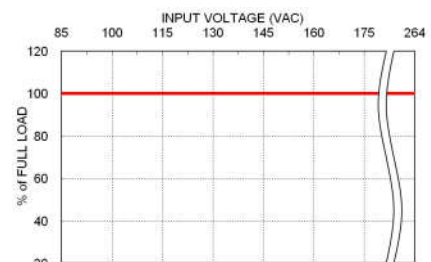

M□D40 Derating Curve vs. Input Voltage

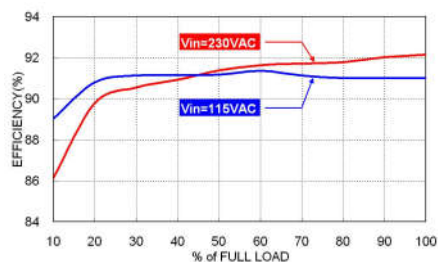


M□D40US24B Efficiency vs. Output Load

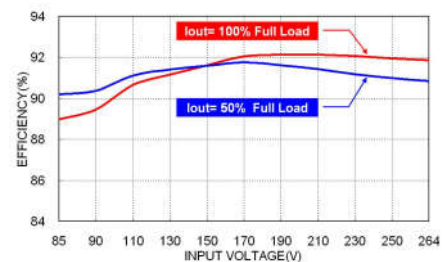

M□D40US24B Efficiency vs. Input Voltage

MECHANICAL DRAWING


MAD Open type

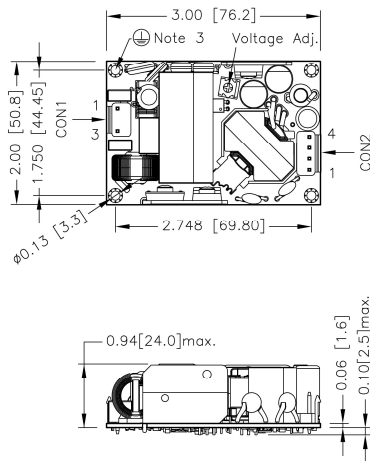

FRONT VIEW

1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$] $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
2. The screw locked torque: MAX 5.0kgf-cm/0.49N-m
3. The screws holes can be considered as PE connection for CLASS I application.


MDD Din rail type

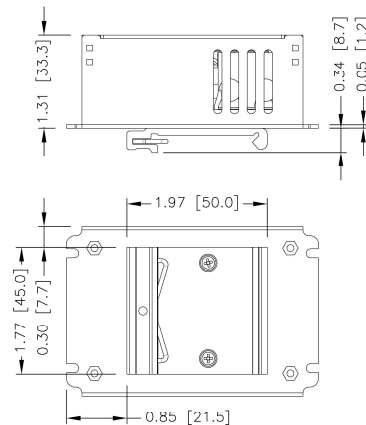

BOTTOM VIEW

1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$] $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]


MED Enclosed type

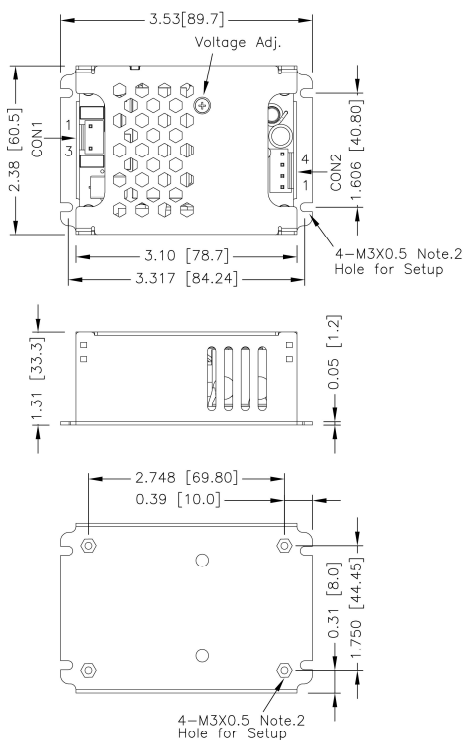

BOTTOM VIEW

1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$] $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
2. The screw locked torque: MAX 5.0kgf-cm/0.49N-m

MUD U chassis type

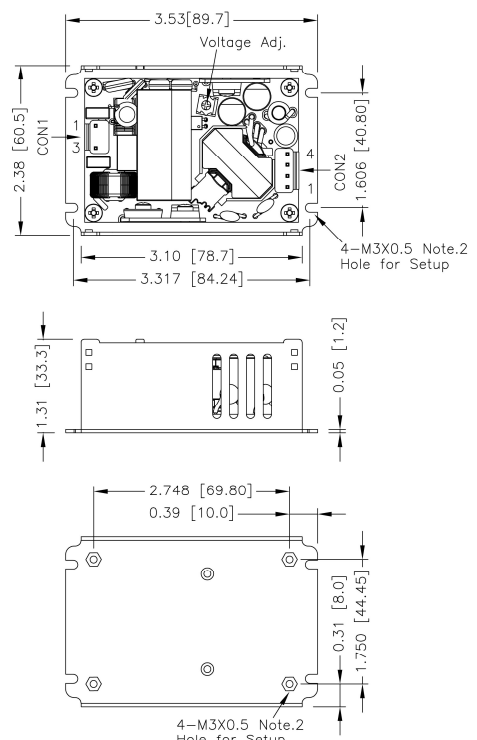

BOTTOM VIEW

1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$] $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
2. The screw locked torque: MAX 5.0kgf-cm/0.49N-m

CONNECTOR CONNECTIONS

CON1 – Input Connector

Pin Number	AC Input	DC Input
		M□D40USXXC、M□D40USXXD
Pin 1	Line	DC+
Pin 3	Neutral	DC-

CON2 – Output Connector

Pin 1,2	-Vout
Pin 3,4	+Vout

*Either one of four screws holes of Chassis type can be considered as PE connection for CLASS I application.

CONNECTOR OPTIONS

Blank:

JST Type

Mates with housing

CON1: **VHR-3N**

CON2: **VHR-4N**



Crimp terminals

CON1: **SVH-21T-P1.1**

CON2: **SVH-21T-P1.1**

-M

Molex Type

Mates with housing

CON1: **09-50-8031**

CON2: **09-50-8041**



Crimp terminals

CON1: **SD-2478**

CON2: **SD-2478**

-T

Terminal Block

Mates with

Screw locked torque
MAX 2Kgf.cm/0.2N.m



Wire dimension range
26 ~ 16AWG